

A3AB Series

3 Socket MIL-Style, Polycarbonate Molded Connector, Permanent Mount, 250 °F (121 °C) Max Temp





VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ 3 Socket Connection for use with CTC Biaxial AC119-1D & BSFA333-IV sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

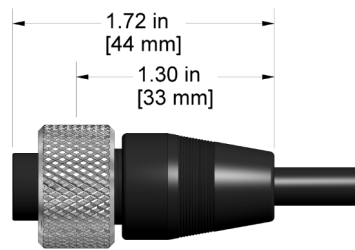

Specifications

| | |
|-----------------|--|
| Application | Permanent Installation |
| Max Temperature | 250°F (121°C) |
| Shell Material | Polycarbonate Molded |
| Rating | IP68 |
| Pin-Out | A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black |

Stock Product

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900