

A3L Series

3 Socket MIL-Style, Polycarbonate Molded Hydraulic Hose Connector, Permanent Mount, 212 °F (100 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



Product Features

Compatible with CTC CB500 Series Hydraulic Hose Protected Cabling

- ▶ 3 Socket Connection for use with CTC Dual Output & Negative Voltage Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

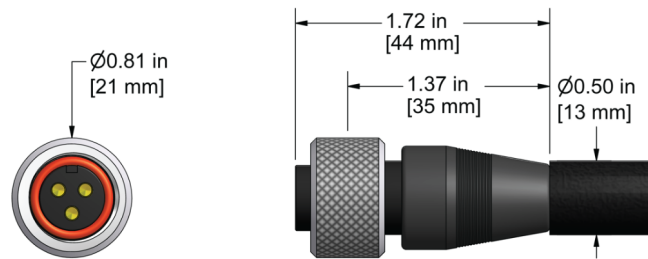

Specifications

Application	Permanent Mount
Max Temperature	212° F (100° C)
Connector Type	3 Socket MIL-Style Connector
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) CTC Red B = Common (-) CTC Black C = Signal (+) CTC White

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900