

D2C Series




VIBRATION ANALYSIS HARDWARE

2 Socket MIL-Spec Connector with Custom Molded Polyurethane Strain Relief, Portable Measurement, 250 °F (121 °C) Max Temp

Product Features

- ▶ 2 Socket Connection
- ▶ Rubber Bending Strain Relief
- ▶ IP66 Rated

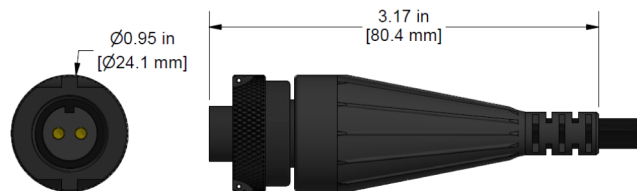

Specifications

Application	Portable Measurements
Max Temperature	250° F (121° C)
Connector Type	2 Socket MIL-Spec
Strain Relief	Rubber Bending Strain Relief
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900