

D3CB Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL Connector with Rubber Bending Strain Relief, Wired as X and Z Entry, Portable Measurements, 250 °F (121 °C) Max Temp

Product Features

3 Socket Connector for use with Biaxial AC1999/A333-IV sensors

Custom Bendable Polyurethane Strain Relief

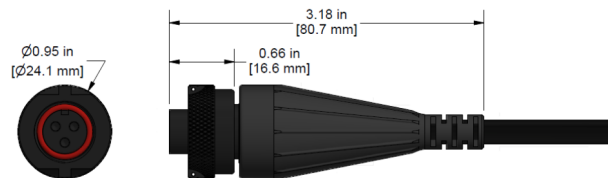

Specifications

Application	Portable Monitoring
Max Temperature	250°F (121°C)
Connector Type	3 Socket MIL
Strain Relief	Molded Polyurethane
Shell Material	Steel
Connector Insert Material	Neoprene
Rating	IP66
Pin-Out	Pin A: X Axis (+) Pin B: Z Axis (+) Pin C: Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900