

# K3C Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Style Connector with Rubber Bending Strain Relief, Polyurethane Molded, Portable Measurement, 250 °F (121 °C) Max Temp

## Product Features

- ▶ 316L Stainless Steel Locking Ring
- ▶ Rubber Bending Strain Relief
- ▶ 250°F Max Temp

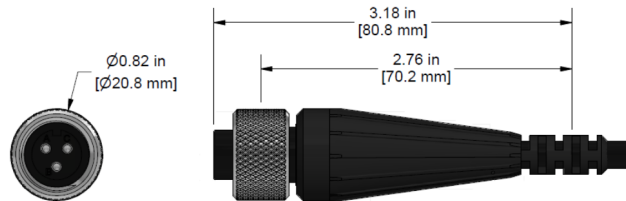

## Specifications

Application	Portable Measurement
Max Temperature	250° F (121° C)
Connector Type	3 Socket MIL-Style
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane
Connector Insert Material	Polyurethane
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-) C = Signal (+)

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900