

# V2N Series



VIBRATION ANALYSIS HARDWARE

2 Socket MIL-Style, Seal-Tight Viton® Boot Connector with Nylon Insert, Permanent Mount, 250 °F (121 °C) Max Temp


## Product Features

- ▶ 2 Socket Connection for use with CTC Standard & Compact Size, Single Axis Sensors
- ▶ Ideal for Wet & Caustic Environments
- ▶ Creates an IP69 Rated Seal



Ø0.89 in  
[22.6 mm]

3.19 in  
[81.0 mm]

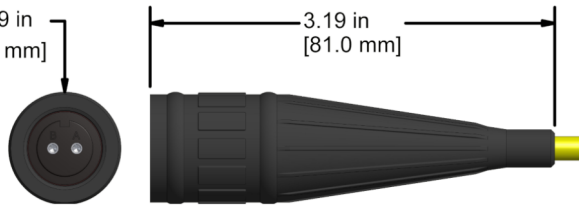

## Specifications

Application	Permanent Mount
Max Temperature	250° F (121° C)
Connector Type	2 Socket Viton® Seal Tight Boot
Boot Material	Viton®
Pin Contact Material	Nylon
Rating	IP69
Pin-Out	A = Signal (+) B = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900