


V4J Series

4 Socket Mini-MIL Seal-Tight Viton® Boot with Polycarbonate Insert, for 4 Pin Mini-MIL Triaxial Accelerometers, Permanent Mount, 250 °F (121 °C) Max Temp



Product Features

- ▶ 4 Socket Mini-MIL Connection for use with CTC Triaxial Sensors
- ▶ Ideal for Wet & Caustic Environments
- ▶ Creates an IP69 Rated Seal

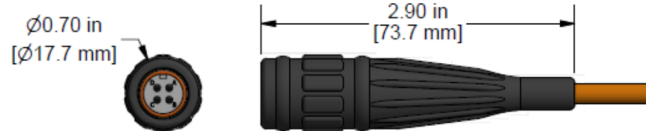

Specifications

Application	Permanent Monitoring
Max Temperature	250°F (121°C)
Connector Type	4 Socket mini-MIL
Boot Material	Viton®
Connector Insert Material	Polycarbonate
Rating	IP69
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900